


製 品 図

日本プラスチック工業株式会社

品 名	水道用耐衝撃性硬質ポリ塩化ビニル管継手（チーズ） H I - C （ J I S K 6 7 4 3 規格品）
-----	---

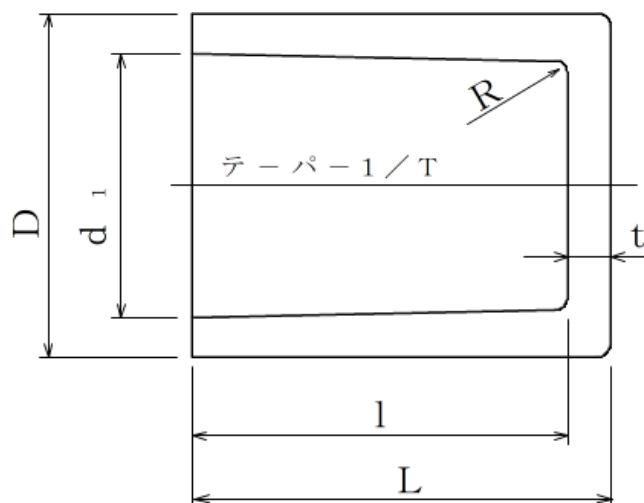

単位：mm

呼び径	D	d_1	d (最小)	$1/T$	l $\begin{matrix} +4 \\ -0.5 \end{matrix}$	t	L $\begin{matrix} +5 \\ -0 \end{matrix}$
13	24.0 (-0.6)	18.40 ± 0.20	13	1/30	26.0	3.0 (-0.3)	29.0
16	29.0 (-0.7)	22.40 ± 0.20	16	1/34	30.0	3.5 (-0.3)	33.5
20	33.0 (-0.8)	26.45 ± 0.20	20	1/34	35.0	3.5 (-0.3)	38.5
25	40.0 (-1.0)	32.55 ± 0.25	25	1/34	40.0	4.0 (-0.4)	44.0
30	46.0 (-1.0)	38.60 ± 0.25	31	1/34	44.0	4.0 (-0.4)	48.0
40	57.0 (-1.2)	48.70 ± 0.30	40	1/37	55.0	4.5 (-0.4)	59.5
50	70.0 (-1.5)	60.80 ± 0.30	51	1/37	63.0	5.0 (-0.5)	68.0