


製 品 図

日本プラスチック工業株式会社

| | |
|-----|---|
| 品 名 | 水道用耐衝撃性硬質ポリ塩化ビニル管継手（チーズ） H I - T （ J I S K 6 7 4 3 規格品） |
|-----|---|

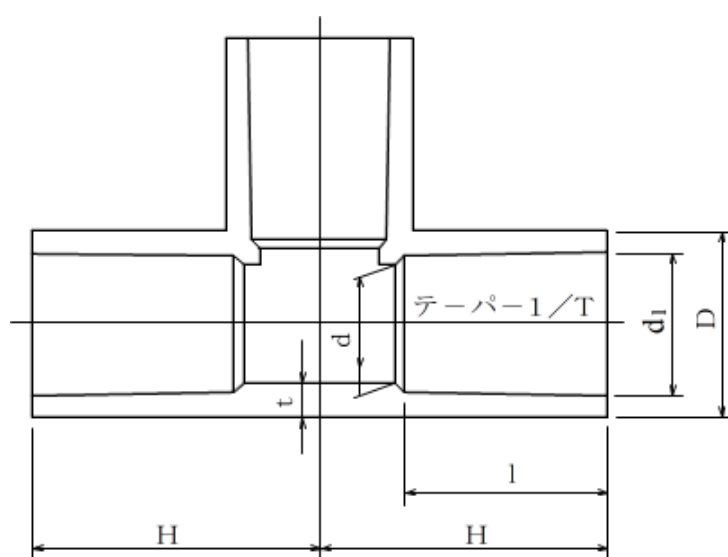

単位：mm

| 呼び径 | D | d ₁ | d (最小) | 1 / T | l ⁺⁴ -0.5 | t | H ⁺⁵ -1 |
|-----|-------------|----------------|-----------|-------|----------------------------|------------|--------------------------|
| 13 | 24.0 (-0.6) | 18.40 ± 0.20 | 13 | 1/30 | 26.0 | 3.0 (-0.3) | 36 |
| 16 | 29.0 (-0.7) | 22.40 ± 0.20 | 16 | 1/34 | 30.0 | 3.5 (-0.3) | 44 |
| 20 | 33.0 (-0.8) | 26.45 ± 0.20 | 20 | 1/34 | 35.0 | 3.5 (-0.3) | 50 |
| 25 | 40.0 (-1.0) | 32.55 ± 0.25 | 25 | 1/34 | 40.0 | 4.0 (-0.4) | 58 |
| 30 | 46.0 (-1.0) | 38.60 ± 0.25 | 31 | 1/34 | 44.0 | 4.0 (-0.4) | 65 |
| 40 | 57.0 (-1.2) | 48.70 ± 0.30 | 40 | 1/37 | 55.0 | 4.5 (-0.4) | 82 |
| 50 | 70.0 (-1.5) | 60.80 ± 0.30 | 51 | 1/37 | 63.0 | 5.0 (-0.5) | 96 |