


# 製 品 図

日本プラスチック工業株式会社

品 名	下水道用硬質塩化ビニル管（接着受口片受け直管） S T （ J S W A S K - 1 規格品）
-----	--

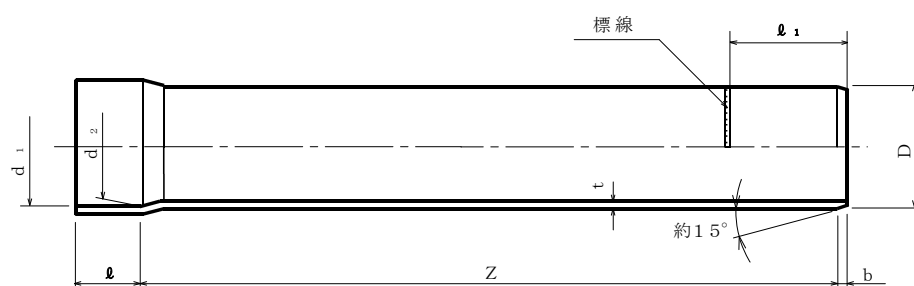

単位：mm

呼び径	D (平均外径)	d <sub>1</sub> (平均内径)	d <sub>2</sub> (平均内径)	t	ℓ	b (参考)	z ± 15	ℓ <sub>1</sub> (参考)
100	114.0 ± 0.4	114.8 ± 0.4	113.2 ± 0.4	3.1 <sup>+0.8</sup> <sub>-0</sub>	50 ± 5	6	4000	56
125	140.0 ± 0.5	140.9 ± 0.4	139.1 ± 0.4	4.1 <sup>+0.8</sup> <sub>-0</sub>	65 ± 5	8	4000	73
150	165.0 ± 0.5	166.1 ± 0.5	163.9 ± 0.5	5.1 <sup>+0.8</sup> <sub>-0</sub>	80 ± 5	12	4000	92
200	216.0 ± 0.7	217.4 ± 0.6	214.6 ± 0.6	6.5 <sup>+1.0</sup> <sub>-0</sub>	115 ± 10	15	4000	130
250	267.0 ± 0.9	268.6 ± 0.6	265.4 ± 0.6	7.8 <sup>+1.2</sup> <sub>-0</sub>	140 ± 10	18	4000	158
300	318.0 ± 1.0	319.8 ± 0.7	316.2 ± 0.7	9.2 <sup>+1.4</sup> <sub>-0</sub>	165 ± 10	20	4000	185
350	370.0 ± 1.2	372.0 ± 0.7	368.7 ± 0.7	10.5 <sup>+1.4</sup> <sub>-0</sub>	200 ± 10	21	4000	221
400	420.0 ± 1.3	422.3 ± 0.8	418.4 ± 0.8	11.8 <sup>+1.6</sup> <sub>-0</sub>	220 ± 10	24	4000	244
450	470 ± 1.5	472.6 ± 0.9	468.1 ± 0.9	13.2 <sup>+1.8</sup> <sub>-0</sub>	250 ± 10	26	4000	276
500	520 ± 1.6	522.8 ± 0.9	518.2 ± 0.9	14.6 <sup>+2.0</sup> <sub>-0</sub>	280 ± 10	29	4000	309
600	630 ± 3.2	634.3 ± 1.1	626.7 ± 1.1	17.8 <sup>+2.8</sup> <sub>-0</sub>	330 ± 10	36	4000	366