


製 品 図

日本プラスチック工業株式会社

品 名	水道用耐衝撃性硬質ポリ塩化ビニル管継手（径違いチーズ） H I - T （ J I S K 6 7 4 3 規格品）
-----	--

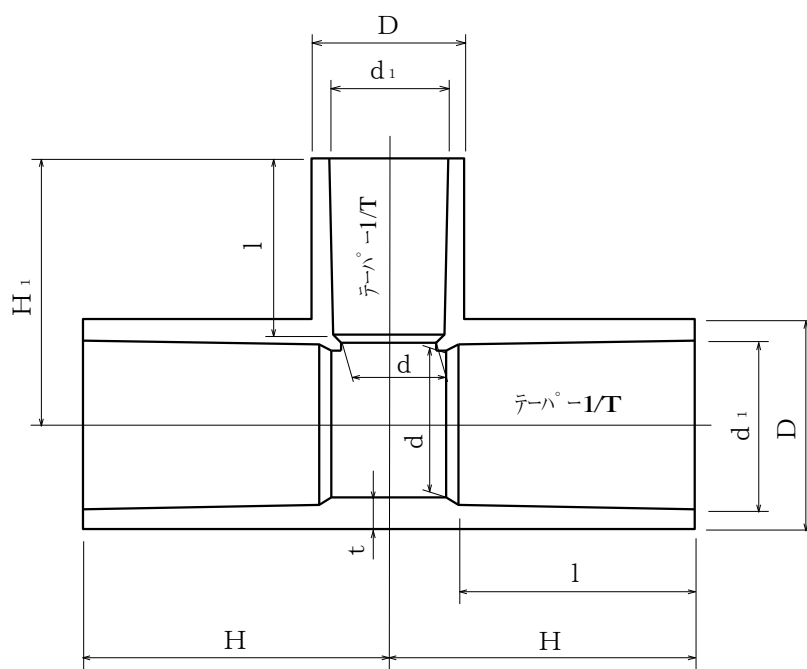

単位：mm

呼び径	D	d ₁	d (最小)	l / T	l ⁺⁴ -0.5	t (最小)	H ⁺⁵ -1	H ₁ ⁺⁵ -1	
							50 × 13	50	70.0 (-1.5)
13	24.0 (-0.6)	18.40 ± 0.20	13	1/30	26.0				
50 × 20	50	70.0 (-1.5)	60.80 ± 0.30	51	1/37	63.0	4.5	78	68
	20	33.0 (-0.8)	26.45 ± 0.20	20	1/34	35.0			
50 × 25	50	70.0 (-1.5)	60.80 ± 0.30	51	1/37	63.0	4.5	81	73
	25	40.0 (-1.0)	32.55 ± 0.25	25	1/34	40.0			
50 × 30	50	70.0 (-1.5)	60.80 ± 0.30	51	1/37	63.0	4.5	84	77
	30	46.0 (-1.0)	38.60 ± 0.25	31	1/34	44.0			
50 × 40	50	70.0 (-1.5)	60.80 ± 0.30	51	1/37	63.0	4.5	90	88
	40	57.0 (-1.2)	48.70 ± 0.30	40	1/37	55.0			