


製 品 図

日本プラスチック工業株式会社

品 名	水道用耐衝撃性硬質ポリ塩化ビニル管 HI-V P (J I S K 6 7 4 2 規格品)
-----	--

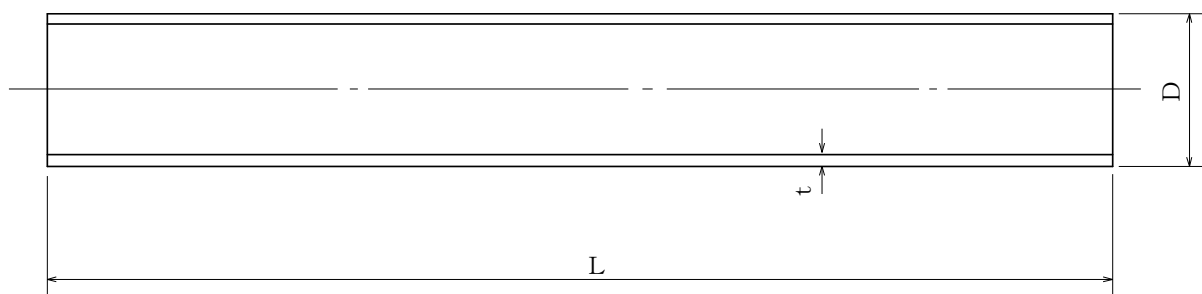

単位：mm

呼び径	外 径 D			厚 さ t		長 さ L	重量 kg/m (参考)
	基本寸法	最大・最小 許容差	平均 許容差	基本寸法	許容差		
13	18.0	±0.2	±0.2	2.5	±0.2	4000	0.17
16	22.0	±0.2	±0.2	3.0	±0.3		0.25
20	26.0	±0.2	±0.2	3.0	±0.3		0.30
25	32.0	±0.2	±0.2	3.5	±0.3		0.44
30	38.0	±0.3	±0.2	3.5	±0.3		0.53
40	48.0	±0.3	±0.2	4.0	±0.3	4000 又は 5000	0.77
50	60.0	±0.4	±0.2	4.5	±0.4		1.10
65	76.0	±0.5	±0.2	4.5	±0.4		1.42
75	89.0	±0.5	±0.2	5.9	±0.4		2.16
100	114.0	±0.6	±0.2	7.1	±0.5		3.34
125	140.0	±0.8	±0.3	7.5	±0.5	4.37	
150	165.0	±1.0	±0.3	9.6	±0.6	6.56	